


C1000 Profile

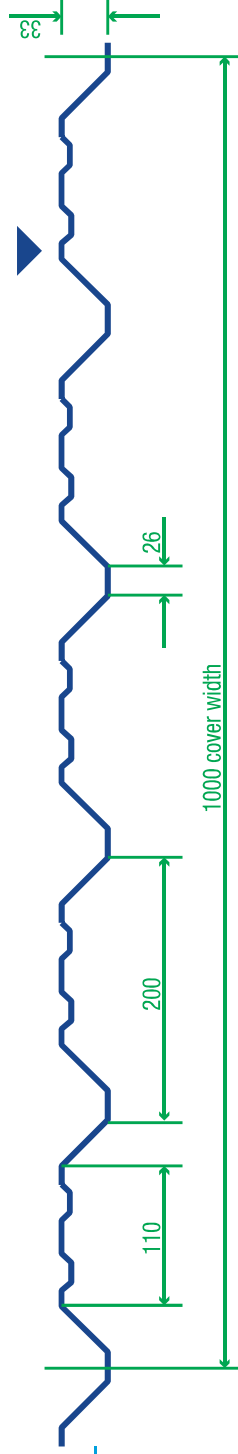

▼ Denotes colour side

Sheet length

Min 200mm Max 15m

| Sound proofing | Curving | Anti-con | Vented | Perforated | Rolled Reverse |
|----------------|---------|----------|--------|------------|----------------|
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

*Curving

Max sheet length

6.5 0.350

Min internal radius

0.150

Min straight leg

| Gauge | 0.4 | 0.5 | 0.6 | 0.7 | 0.9 | 1 | 1.2 |
|------------------------------------|-----|-----|-----|-----|-----|---|-----|
| Material | | | | | | | |
| Aluminium | | ✓ | | ✓ | ✓ | ✓ | ✓ |
| Aluzinc | ✓ | ✓ | | ✓ | ✓ | | |
| Galvanised steel | ✓ | ✓ | | ✓ | ✓ | | |
| Plastisol Polyester & coated steel | ✓ | ✓ | | ✓ | ✓ | | |
| Stainless Steel | | ✓ | | | | | |

C1000